- Environmental quality
- Obtain approbation

Specialized in ecological environmental protection

Exquisite workmanship as core strength

Trustworthy quality and service of the brand

Courage to create a better living environment for the city

Shanghai Nidan Environmental Equipment Co.,Ltd

Address:No.12-2 Shengfu Rd,Jiuting,Songjiang,Shanghai

Tel: 021-57611259

Web: www.yonidan.com

Improve the environment Serve the Environment

Yonidan

佑尼丹

Sewage Lifting Device

For villas, clubs, complexes, places that can't drain water by gravity

- ◆Provide scheme design
- ◆Single/Dual Pump
- ◆Provide Customized Service
- ◆Internal/External

Shanghai Nidan Environmental Equipment Co.,Ltd

Enterprise profile

Shanghai Nidan Environmental Equipment Co., Ltd is a high-tech enterprise in Songjiang District of Shanghai. It's one of the largest and most diverse sewage lifting equipment suppliers in China. Nidan has established strategic cooperation with many famous real estate gaints and pump manufacturers. Nidan is capable of customized design and large-scale production to meet the special requirements of customers.

Nidan's principle is"all is based on user's value". With the scientific research advantages of the Songjiang G60 Science and Innovation Corridor and the transprtation advantages of closing to Hongqiao Station and Airport, adhering to the environmental concept of "improve the environment, serve the environment", Nidan has built two manufacturing bases of 3000 ㎡, and established long-term cooperation with 300+ design institutes and more than a dozen university scientific research institutes in China.

"Yonidan" series products have many patents. They are suitable for almost all places that can't drain by gravity, like the same floor,villas, shopping malls,clubs,hospitals,stadiums,concert halls,subway and etc. The testing by SQI shows many indexes of Nidan are leading the industry.

Nidan has 100+ employees, above 30% have at least five years' industry experience. With flexible design and good quality control, products are widely approved by users. Nidan has very reliable after-sale service network that can guarantee the timely and reliable after sale service.

Nidan will always keep honest, innovative,and earnest to supply qualified products, bringing more convenience and comfort to our life.

Yonidan
佑尼丹

Catalogue

Internal Lifter Series

Yonidanmini 03
Yonidan100 05
Yonidan130 09
Yonidan180 13
Yonidan250 17
Yonidan300 21
Yonidan400 25
Yonidan500 29
Yonidan600 33
Yonidan1000 37

External Lifter Series

Yonidan20 41
Yonidan60 45
Yonidan80 49
Yonidan120 53
Yonidan150 57
Yonidan450 61
Yonidan application cases 65

Product Model Description

Yonidan 60L 075 S

Yonidan Sewage Lifting Pump

Tank Capacity: 60L 100L 120L 180L 150L 250L 450L 500L

Pump Watt: 075=0.75kw 110=1.1kw 150=1.5kw 220=2.2kw 300=3.0kw 370=3.7kw

Pump Quantity: S=Single D=Dual

Yonidan Mini Series

Mini601A

Mini601B

Mini601C

Application

Suitable for toilet of places below the sewer, such as basement, and the daily sewage discharge of shower room, bathtub, wash machine and other equipment that are far from the main drainage pipeline in places like household washroom and bathroom.

Performance Features

※ large diameter, large flow, strong conveying ability
※ New compact structure and small size design, easy to transport
※ Air filter and carburetor are dismountable for maintenance
※ After 24 hours of continuous operation, durability test time can up to 300 hours
※ Good sealing performance, can ensure long time operation with out water leakage.

Operation Condition

Max Sewage Temp: ⋆ 50℃
Max Environment Temp: ⋆ 35℃
PH Value : 4-10
Not suitable for fortified products and reagents.

Model implication

Mini 60 1A

- 1A — Type
- 60 — Input watt x10 (W)
- Mini — Lifter

Dimension 468*168*340mm



A



B



C

Performance Parameter

Model	Watt		Q(m³/h)	0	2.4	3.0	3.6	4.2	4.8	5.4	6
	kW	HP	Q(L/min)	0	40	50	60	70	80	90	100
Mini601A	0.6	0.8	H(m)	8.5	7	6.5	6	5.5	5	4.5	3.5
Mini601B	0.6	0.8		8.5	7	6.5	6	5.5	5	4.5	3.5
Mini601C	0.6	0.8		8.5	7	6.5	6	5.5	5	4.5	3.5

Product Structure

1.upper cap 2.Rotor
3.Winding 4.Bearing Pedestal
5.Stator cover 6.Pump Body Bracket
7.Impeller 8.Pump Body
9.Blade Bracket 10.Blade
11.Adjusting Shim 12.Inlet check valve
13.Inlet cap 14.Inlet Nut 15.Water Tank
16.Water Tank Seal Ring 17.Feed Pipe
18.Feed Pipe Mounting Bracket
19.Water Tank Cap 20.Air Outlet Cap
21.Capacitance 22.Circuit Board
23.Outlet Cap 24.Switch Button
25.Outlet Elbow Pipe 26.Motor Cover
27.Outlet Check Valve
28.Outlet Check Valve Frame
29.Outlet Pipe 30.Air Switch
31.Motor Base 32.Power Supply Cord

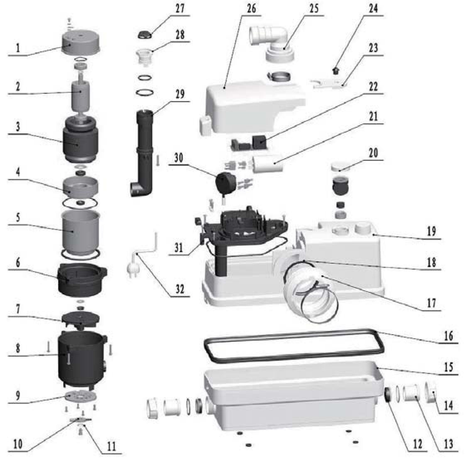

Performance Diagram

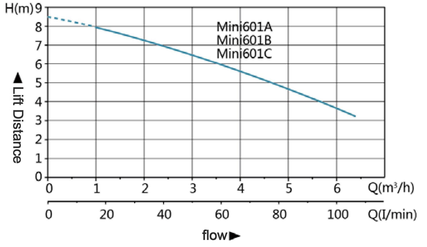

Packing

Model	L(mm)	W(mm)	H(mm)	G.W(kg)
Mini601A	505	215	300	6.5
Mini601B	530	190	300	6.5
Mini601C	530	190	300	6.4



Yonidan100 Series (Single Pump)

Product Description

Yonidan 100 series is the smallest volumetric pressure drainage equipment of sewage lifting equipment, suitable for collecting sewage and wastewater from closestools, platform basin, showers , sink and other situations that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage well.

The Yonidan 100 series products are equipped with multiple pre-inlet. The water tank capacity is about 100L, which is completely airtight and durable, and can be installed and used in small space.

Application

It is suitable for single bathroom in villa basement, small catering basin, appended platform basin in shops , and etc.

Performance Diagram

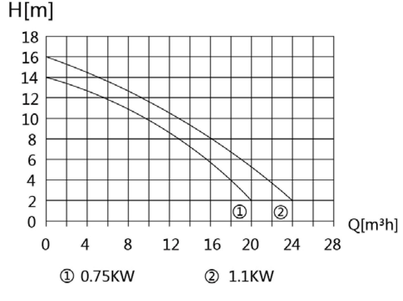

Performance Parameter

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Small size, convenient to install
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan100L075S	100	DN100	DN50	DN40	37
Yonidan100L110S	100	DN100	DN50	DN40	38

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18
Yonidan100L075S	0.75	220	5.2	DN50	Flux (m^3/h)	20	18	16	14	10	6			
Yonidan100L110S	1.1	220	6.6			24	22	20	18	15	10	5		
Yonidan100L075S	0.75	380	1.9			20	18	16	14	10	6			
Yonidan100L110S	1.1	380	2.6			24	22	20	18	15	10	5		

Accessories List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Ventilation Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 500*420*500mm







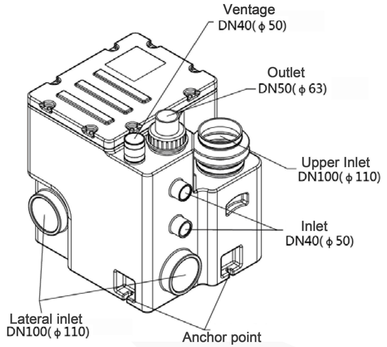

Installation Instruction

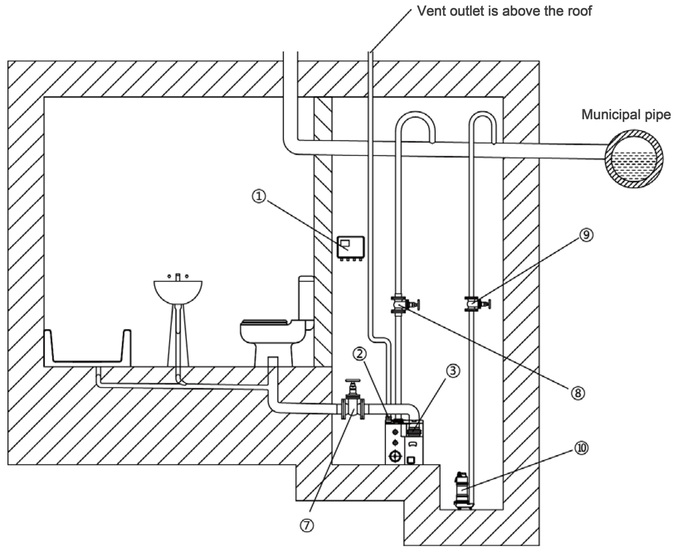

Yonidan130 Series (Single Pump)

Product Description

Yonidan 130 series sewage lifting equipment is designed to collect sewage from closestool, platform basins, showers, sewage basins, bathtubs, washing machines, etc. in situations that can't drainage by gravity, and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 130 series products are equipped with multiple pre-inlet. The water tank capacity is about 120L, which is completely airtight and durable, and can meet different installation conditions.

Application

Suitable for western-style house, villa basement (with laundry), club, small public toilet and etc.

Performance Diagram

Performance Features

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Small size, Wide application
※ All LCD control box

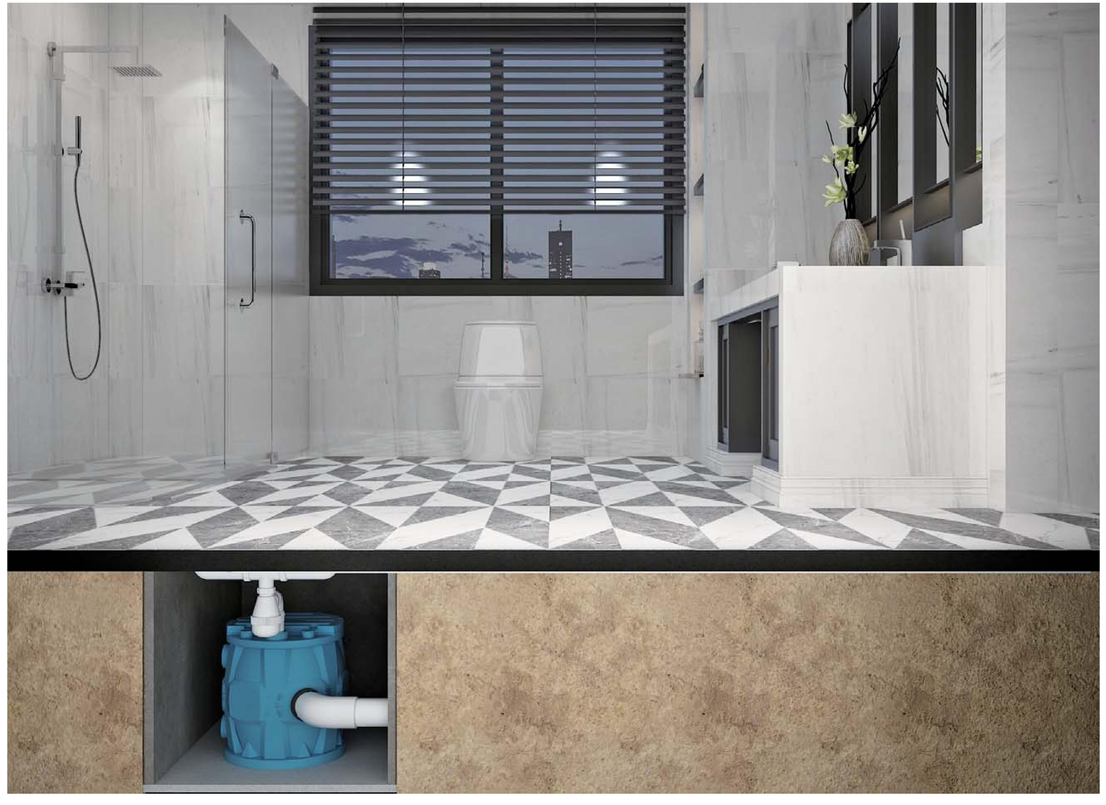

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan130L075S	120	DN100	DN50	DN40	43
Yonidan130L110S	120	DN100	DN50	DN40	44
Yonidan130L150S	120	DN100	DN50	DN40	52

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24
Yonidan130L075S	0.75	220	5.2	DN50	Flux (m^3/h)	20	18	16	14	10	6						
Yonidan130L110S	1.1	220	6.6			24	22	20	18	15	10	5					
Yonidan130L150S	1.5	220	7.6			36	32	30	28	24	21	17	13	8			
Yonidan130L075S	0.75	380	1.9			20	18	16	14	10	6						
Yonidan130L110S	1.1	380	2.6			24	22	20	18	15	10	5					
Yonidan130L150S	1.5	380	3.2			36	32	30	28	24	21	17	13	8			

Accessories List

No.	Accessoty	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Ventilation Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 550*600mm

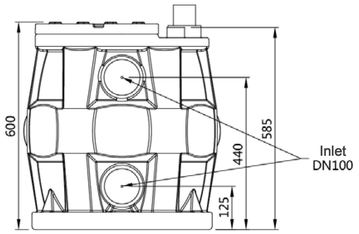







Installation Instruction

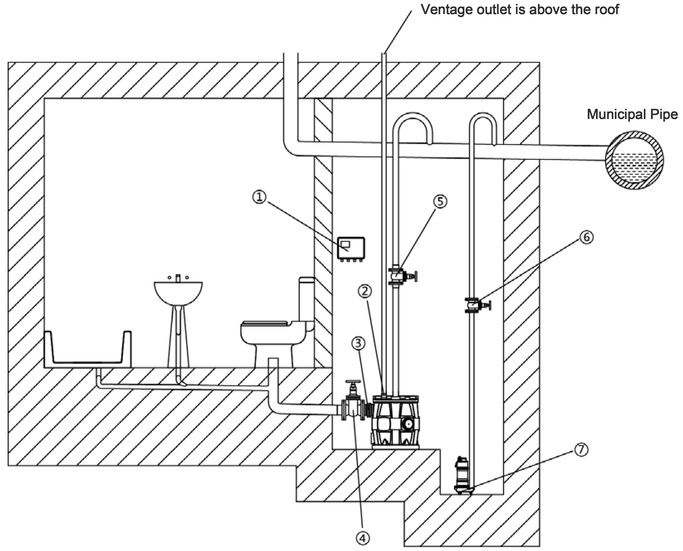

Product Description

Yonidan 180 series sewage lifting equipment is designed to collect sewage from closestools, platform basins, showers, sewage basins, bathtubs, washing machines, etc. in situations that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 180 series products are equipped with multiple pre-inlet. The water tank capacity is about 180L, which is completely airtight and durable, and can meet different installation conditions.

Application

Suitable for western-style house, villa basement (with laundry) , club, small public toilet and etc.

Performance Diagram

Performance Features

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Small size, Wide application
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan180L075S	160	DN100	DN50	DN40	46
Yonidan180L110S	160	DN100	DN50	DN40	47
Yonidan180L150S	160	DN100	DN50	DN40	55

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24
Yonidan180L075S	0.75	220	5.2	DN50	Flux (m^3/h)	20	18	16	14	10	6						
Yonidan180L110S	1.1	220	6.6			24	22	20	18	15	10	5					
Yonidan180L150S	1.5	220	7.6			36	32	30	28	24	21	17	13	8			
Yonidan180L075S	0.75	380	1.9			20	18	16	14	10	6						
Yonidan180L110S	1.1	380	2.6			24	22	20	18	15	10	5					
Yonidan180L150S	1.5	380	3.2			36	32	30	28	24	21	17	13	8			

Accessories List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Ventilation Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 650*520*655mm





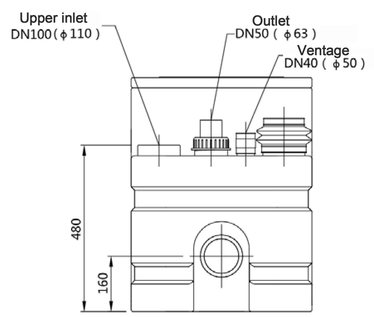



Installation Instruction

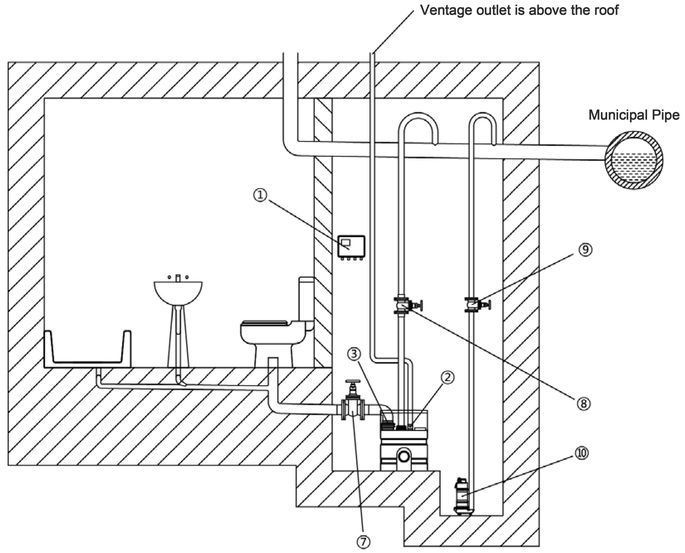

Yonidan 250 Series(Dual Pump)

Product Description

Yonidan 250 series sewage lifting equipment is designed to collect sewage from closestools, platform basins, showers, sewage basins, bathtubs, washing machines, and such that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 250 series products are equipped with 250L corrosion resistant PE collection barrel. There are multiple water inlets that can meet the installation requirement in smaller size foundation pits

Application

Suitable for big villa, multiple bathrooms in the basement of the western-style house, club, parking lot, KTV and etc.

Performance Diagram

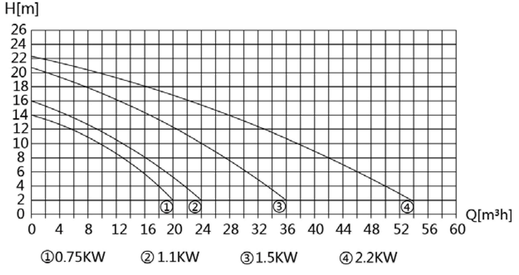

Performance Features

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Small size, Wide application
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan250L075D	220	DN100	DN50	DN40	75
Yonidan250L110D	220	DN100	DN50	DN40	77
Yonidan250L150D	220	DN100	DN50	DN40	90
Yonidan250L220D	220	DN100	DN50	DN40	95

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24
Yonidan250L075D	0.75	220	5.2	DN50	flux (m^3/h)	20	18	16	14	10	6						
Yonidan250L110D	1.1	220	6.6			24	22	20	18	15	10	5					
Yonidan250L150D	1.5	220	7.6			36	32	30	28	24	21	17	13	8			
Yonidan250L075D	0.75	380	1.9			20	18	16	14	10	6						
Yonidan250L110D	1.1	380	2.6			24	22	20	18	15	10	5					
Yonidan250L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8			
Yonidan250L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8		

Accessory List

No.	Accessory	Model	Qty	Notes
1	controller	NK-2	1	Standard Equoped
2	Ventilation Hose	DN40	1	Standard Equoped
3	Inlet Hose	DN100	1	Standard Equoped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 760*550*655mm







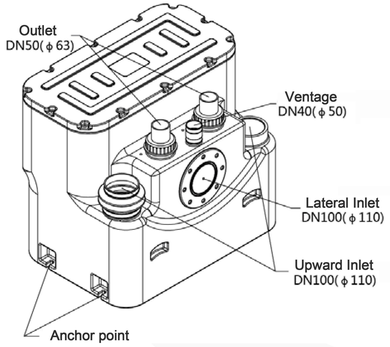

Installation Instruction

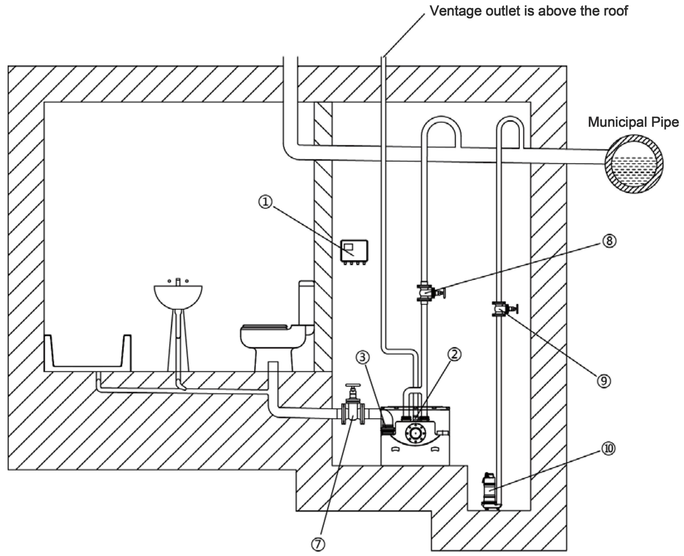

Yonidan 300 Series（Dual Pump)

Product Description

Yonidan 300 series sewage lifting equipment is designed to collect sewage from closestools, platform basins, showers, sewage basins, bathtubs, washing machines, etc. in situations that can’t drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 300 series products are equipped with 250L corrosion resistant PE collection barrel. There are multiple water inlets that can meet the installation requirement in smaller size foundation pits

Application

Suitable for big villa, multiple bathrooms in the basement of the western-style house, club, parking lot, KTV and etc.

Performance Diagram

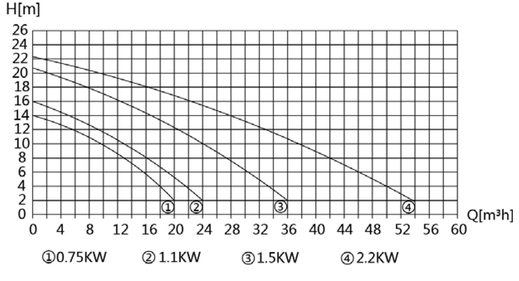

Performance Features

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Large tank capacity
※ All LCD control box

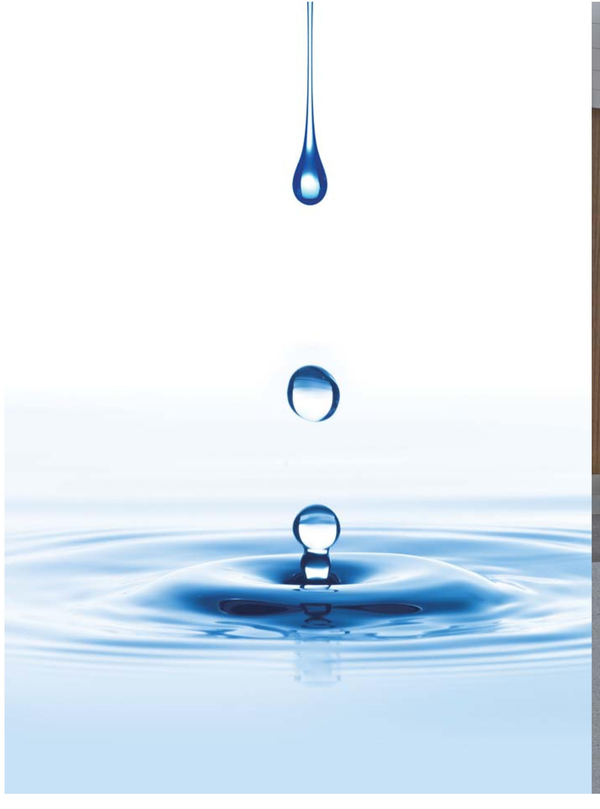

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan300L075D	300	DN100	DN50	DN40	79
Yonidan300L110D	300	DN100	DN50	DN40	81
Yonidan300L150D	300	DN100	DN50	DN40	94
Yonidan300L220D	300	DN100	DN50	DN40	99

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24
Yonidan300L075D	0.75	220	5.2	DN50	flux (m^3/h)	20	18	16	14	10	6						
Yonidan300L110D	1.1	220	6.6			24	22	20	18	15	10	5					
Yonidan300L150D	1.5	220	7.6			36	32	30	28	24	21	17	13	8			
Yonidan300L075D	0.75	380	1.9			20	18	16	14	10	6						
Yonidan300L110D	1.1	380	2.6			24	22	20	18	15	10	5					
Yonidan300L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8			
Yonidan300L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8		

Accessory List

NO.	Accessory	Model	Qty	Notes
1	controller	NK-1	1	Standard Equiped
2	Ventilation Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Inlet Stop Valve	DN100	1	Optional
5	Outlet Stop Valve	DN50	1	Optional
6	Auxiliary pump outlet stop valve	DN40	1	Optional
7	Auxiliary Pump	/	1	Optional

Dimension 775*750mm

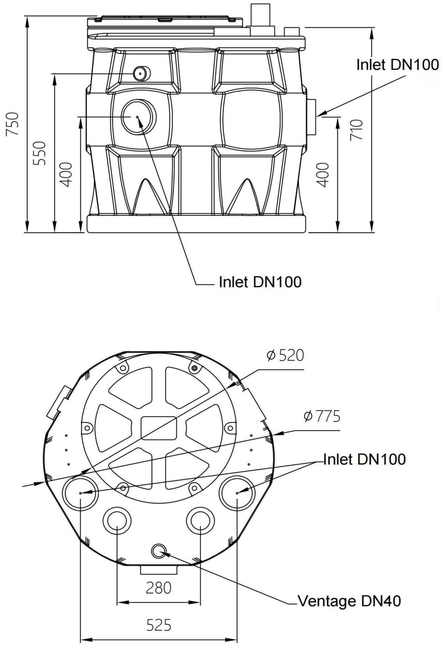

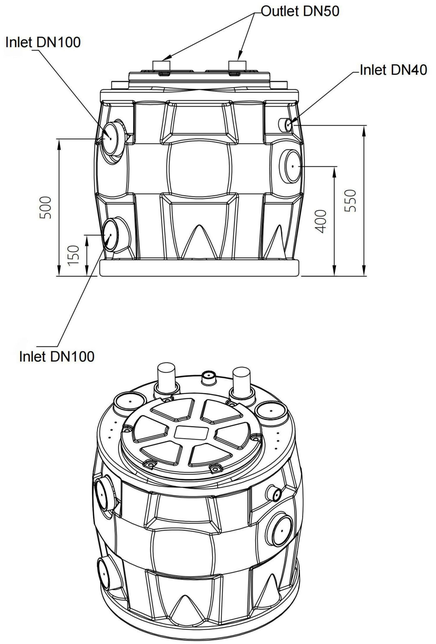

Installation Instruction

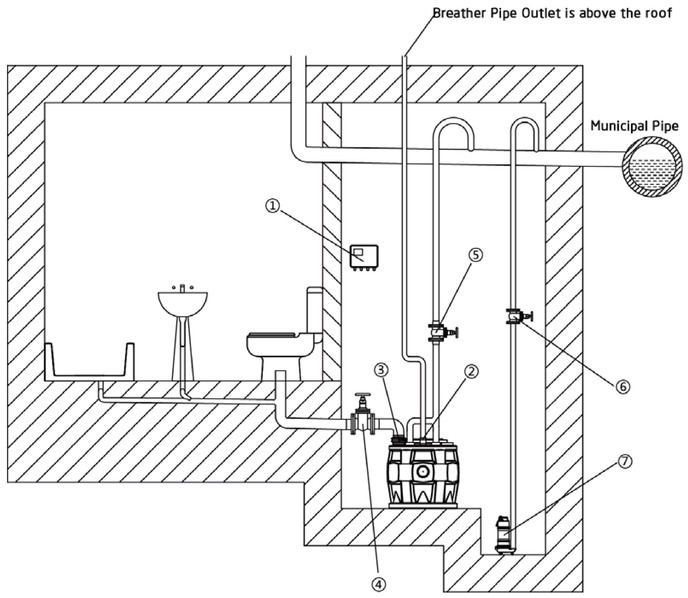

Yonidan 400 Series(Dual Pump)

Product Description

Yonidan 400 series sewage lifting equipment is designed to collect sewage from closestools, platform basins, showers, sewage basins, bathtubs, washing machines and etc, in situations that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 400 series products are equipped with 400L corrosion resistant PE collection barrel. There are multiple water inlets that can meet the installation requirement in smaller size foundation pits。

Application

Suitable for big villa, multiple bathrooms in the basement of the western-style house, club, parking lot, KTV and etc.

Performance Diagram

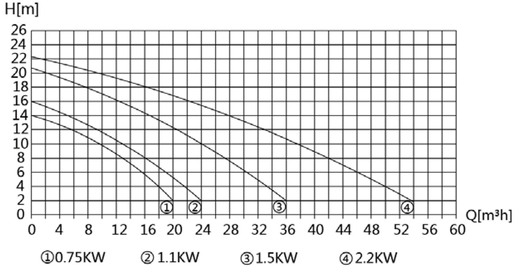

Performance Features

※ One sewage pump installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Small size, Wide application
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan400L075D	360	DN100	DN50	DN50	85
Yonidan400L110D	360	DN100	DN50	DN50	87
Yonidan400L150D	360	DN100	DN50	DN50	100
Yonidan400L220D	360	DN100	DN50	DN50	105

Selection table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24
Yonidan400L075D	0.75	220	5.2	DN50	flux (m^3/h)	20	18	16	14	10	6						
Yonidan400L110D	1.1	220	6.6			24	22	20	18	15	10	5					
Yonidan400L150D	1.5	220	7.6			36	32	30	28	24	21	17	13	8			
Yonidan400L075D	0.75	380	1.9			20	18	16	14	10	6						
Yonidan400L110D	1.1	380	2.6			24	22	20	18	15	10	5					
Yonidan400L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8			
Yonidan400L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8		

Accessory List

Model	Accessory	Model	Qty	Notes
1	controller	NK-2	1	Standard Equoped
2	Inlet Hose	DN100	1	Standard Equoped
3	Inlet Stop Valve	DN100	1	Standard Equoped
4	Outlet Stop Valve	DN50	1	Optional
5	Auxiliary pump outlet stop valve	DN40	1	Optional
6	Auxiliary Pump	/	1	Optional

Dimension 890*660*720mm









Installation Instruction

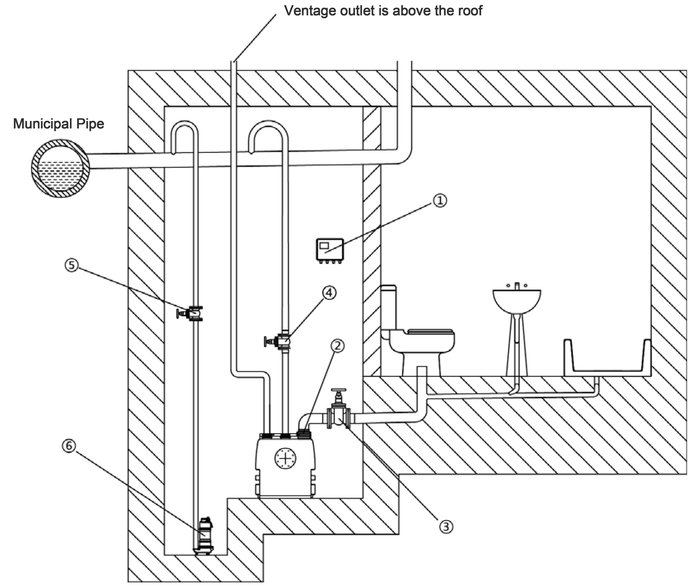

Yonidan 500 Series(Dual Pump)

Product Description

Yonidan 500 series sewage lifting equipment is designed to collect sewage from closestools, platform basins, showers, sewage basins, bathtubs, washing machines and etc, in situations that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 500 series products are equipped with 500L corrosion resistant PE collection barrel. There are multiple water inlets so that It can be installed in the foundation pit with different complex water inlet requirements

Applocation

Suitable for club, hotel,cybercafe,hospital,parking lot, library and etc

Performance Diagram

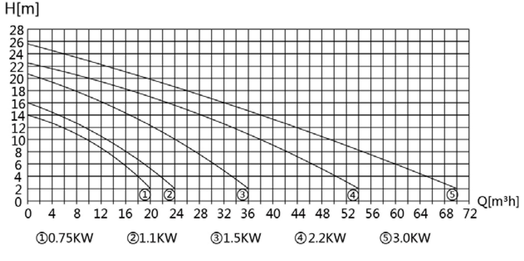

Performance Features

※ Two sewage pumps installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Large water tank capacity
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan500L075D	430	DN150/DN100	DN50	DN50	83
Yonidan500L110D	430	DN150/DN100	DN50	DN50	85
Yonidan500L150D	430	DN150/DN100	DN50	DN50	99
Yonidan500L220D	430	DN150/DN100	DN50	DN50	104
Yonidan500L300D	430	DN150/DN100	DN50	DN50	113

Selection table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24	26	28
Yonidan500L075D	0.75	220	5.2	DN50	flux (m^3/h)	20	18	16	14	10	6								
Yonidan500L110D	1.1	220	6.6			24	22	20	18	15	10	5							
Yonidan500L150D	1.5	220	7.6			36	32	30	28	24	21	17	13	8					
Yonidan500L075D	0.75	380	1.9			20	18	16	14	10	6								
Yonidan500L110D	1.1	380	2.6			24	22	20	18	15	10	5							
Yonidan500L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8					
Yonidan500L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8				
Yonidan500L300D	3	380	6.6			70	66	61	56	50	44	37	32	26	18	12	6		

Accessory List

No.	Accessoty	Model	Qty	Notes
1	controller	NK-2	1	Standard Equiped
2	Inlet Gose	DN100	1	Standard Equiped
3	Inlet Stop Valve	DN100	1	Standard Equiped
4	Outlet Stop Valve	DN50	1	Optional
5	Auxiliary pump outlet stop valve	DN40	1	Optional
6	Auxiliary Pump	/	1	Optional

Dimension 900*750*750mm







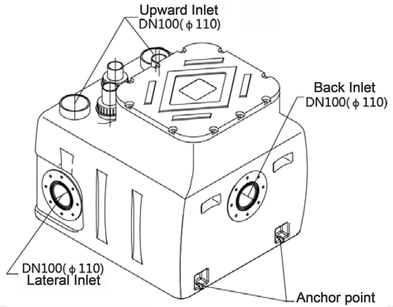

Installation Instruction

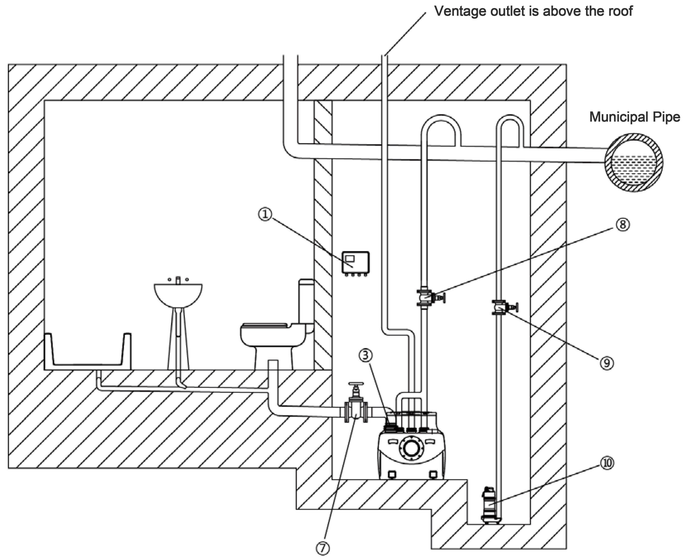

Yonidan 600 Series(Dual Pump)

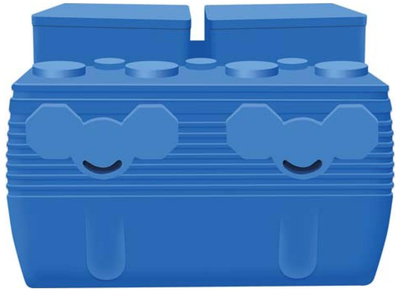

Product Descroption

Yonidan 600 series sewage lifting equipment is designed to collect sewage from closestool, platform basins, showers, sewage basins, bathtubs, washing machines and etc, in situations that can't drainage by gravity,and then pump it to the main sewage pipe or outdoor sewage Wells.

The Yonidan 600 series products are equipped with 600L corrosion resistant PE collection barrel. There are multiple water inlets so that It can be installed in the foundation pit with different complex water inlet requirements

Application

Suitable for club, hotel,cybercafe,hospital,parking lot, library and etc.

Performance Diagram

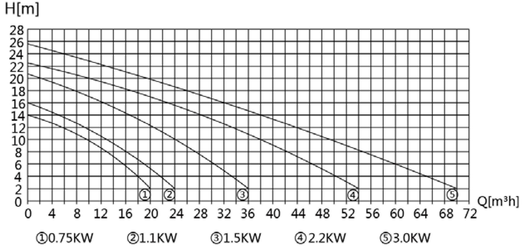

Performance Features

※ Two sewage pumps installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Large water tank capacity
※ All LCD control box

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Breather Pipe	Weight(kg)
Yonidan600L075D	560	DN100	DN50	DN50	92
Yonidan600L110D	560	DN100	DN50	DN50	94
Yonidan600L150D	560	DN100	DN50	DN50	108
Yonidan600L220D	560	DN100	DN50	DN50	113
Yonidan600L300D	560	DN100	DN50	DN50	122

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24	26	28
Yonidan600L075D	0.75	220	5.2	DN50	flux (m^3/h)	20	18	16	14	10	6								
Yonidan600L110D	1.1	220	6.6			24	22	20	18	15	10	5							
Yonidan600L150D	1.5	220	7.6			36	32	30	28	24	21	17	13	8					
Yonidan600L075D	0.75	380	1.9			20	18	16	14	10	6								
Yonidan600L110D	1.1	380	2.6			24	22	20	18	15	10	5							
Yonidan600L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8					
Yonidan600L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8				
Yonidan600L300D	3	380	6.6			70	66	61	56	50	44	37	32	26	18	12	6		

Accessory List

No.	Accessory	Model	Qty	Notes
1	controller	NK-2	1	Standard Equiped
2	Outlet Hose	DN50	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Vent Pipe Hose	DN50	1	Standard Equiped
5	Inlet Stop Valve	DN100	1	Optional
6	Outlet Stop Valve	DN50	1	Optional
7	Auxiliary pump outlet stop valve	DN40	1	Optional
8	Auxiliary Pump	/	1	Optional

Dimension 1015*910*720mm

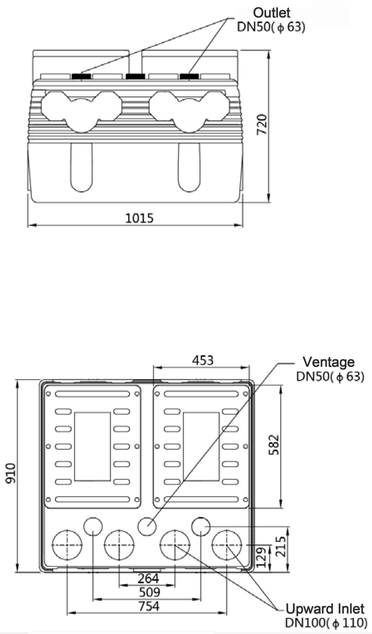

Installation Instruction

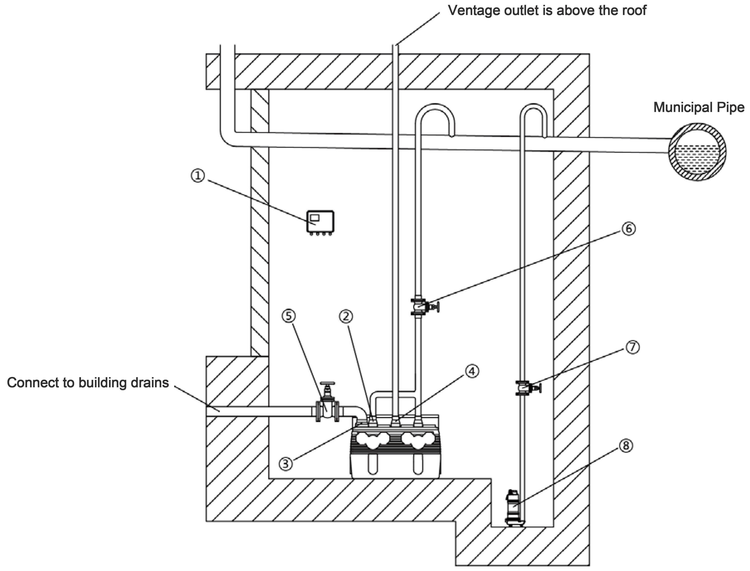

Yonidan 1000 Series(Dual Pump)

Product Description

Yonidan 1000 series sewage lifting equipment is designed to collect sewage from closestool, platform basins, showers, sewage basins, bathtubs, washing machines and etc, in situations that can't drainage by gravity,and then pump it to the main sewage pipes or outdoor sewage Wells.
The Yonidan 1000 series products are equipped with 1000L corrosion resistant PE collection barrel. There are multiple water inlets so that It can be installed in the foundation pit with different complex water inlet requirements

Performance Features

※ Two sewage pumps installed inside
※ Corrosion-resistant PE water tank
※ Anchor port is equipped on water tank
※ Completely sealed, no odor emission
※ Coupling connection, convenient for maintenance
※ Multiple water inlets, easy to connect
※ Stainless steel check valve
※ Large water tank capacity
※ All LCD control box

Applocation

Suitable for club, hotel,cybercafe,hospital, parking lot, library,shopping mall and etc.

Performance Diagram

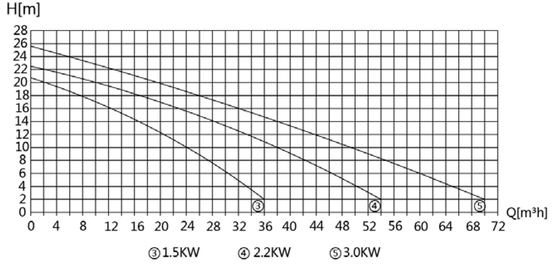

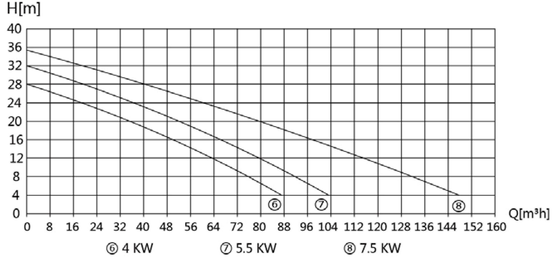

Technical Parameter

Model	Tank Capacity(L)	Inlet	Outlet	Vent Pipe	Weight(KG)
Yonidan1000L150D	1000	DN150/DN100	DN50	DN40	148
Yonidan1000L220D	1000	DN150/DN100	DN50	DN40	154
Yonidan1000L300D	1000	DN150/DN100	DN50	DN40	163
Yonidan1000L400D	1000	DN150/DN100	DN50	DN40	168
Yonidan1000L550D	1000	DN150/DN100	DN65	DN40	230
Yonidan1000L750D	1000	DN150/DN100	DN80	DN40	250

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38
Yonidan1000L150D	1.5	220	7.6	DN50	flux (m^3/h)	36	32	30	28	24	21	17	13	8										
Yonidan1000L150D	1.5	380	3.2			36	32	30	28	24	21	17	13	8										
Yonidan1000L220D	2.2	380	5.8			56	53	50	46	41	35	28	21	15	8									
Yonidan1000L300D	3	380	6.6			70	66	61	56	50	44	37	32	26	18	12	6							
Yonidan1000L400D	4	380	8.8			92	87	81	76	70	63	56	49	42	35	28	18	9						
Yonidan1000L550D	5.5	380	11.8	DN65		108	103	97	92	85	80	71	66	59	52	44	37	28	19	9				
Yonidan1000L750D	7.5	380	15.2	DN80		154	148	140	132	125	115	108	97	88	80	71	61	50	40	31	19	8		

Accessory List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-2	1	Standard Euipqed
2	Vent Hose	DN40	1	Standard Euipqed
3	Inlet Hose	DN100	1	Standard Euipqed
4	Inlet Flange	DN150/DN100	1	Standard Euipqed
5	Inlet Stop Valve	DN150/DN100	1	Optional
6	Outlet Stop Valve	DN100/DN150	1	Optional
7	Auxiliary pump outlet stop valve	DN40	1	Optional
8	Auxiliary Pump	/	1	Optional

Dimension 1080*1080*1000mm

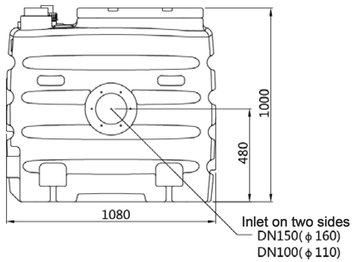







Installation Instruction

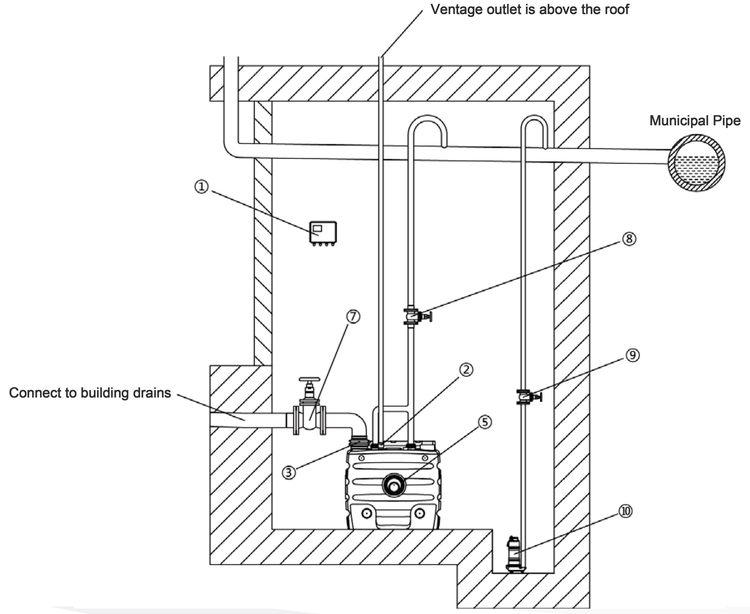

Yonidan 20 Series(Single Pump)

Product Description

The Yonidan20 series is a miniature lifting device. Mainly used in basements below municipal sewage pipes or the same floor without sewage pipes.
It is designed for sewage drainage from closestool, shower, wash basin, bar sink, air conditioner and etc.
Voltage:220V.
Yonidan20 series are equiped with corrosion-resistant and environmental PE water tank, with good sealing and durability. It is of small size, light and convenient, with good appearance. The tank capacity is about 20L. Multiple horizontal inlets are reserved for easy installation

Performance Diagram

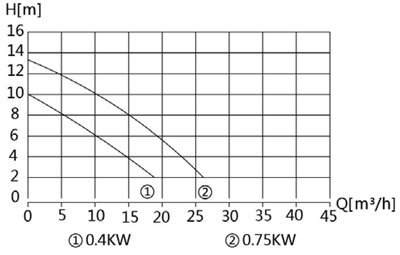

Performance Features

※ Pump equips with on-blocking vortex impeller.
Optional power: 0.4~0.75 kW
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250;
Pump Shaft Material: SUS410
※ Maximum flow diameter:35mm
※ Maximum pump startup times:60 times/hour
※ Cable length between controller and pump/float:5 meters
※ Equips with DN40 check valve
※ Outlet pipe diameter DN40 vertical outlet
(variable diameter)
※ Starting mode: air pressure/float dual level control.
Unique double-protection design
※ Machine waterproof grade :IP68(excluding control box)

Technical Parameter

Model	Tank Capacity(L)	Flow Dia(mm)	Inlet	Outlet	Vent Pipe	Weight(KG)
Yonidan20L040S	20	35	DN100	DN80	DN40	23
Yonidan20L075S	20	35	DN100	DN80	DN40	24

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Oitlet	Lift Distance (m)	2	4	6	8	10	12	14	16
Yonidan20L040S	0.4	220	3.2	DN40	flux (m^3/h)	18	15	10	5				
Yonidan20L075S	0.75	220	5.2			26	23	19	15	10	5		

Accessory List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN40	1	Standard Equiped
5	Outlet Stop Valve	DN40	1	Optional

Dimension 520*260*367mm

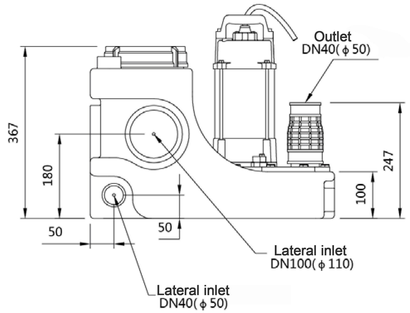



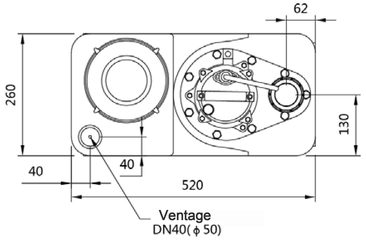



Installation Instruction

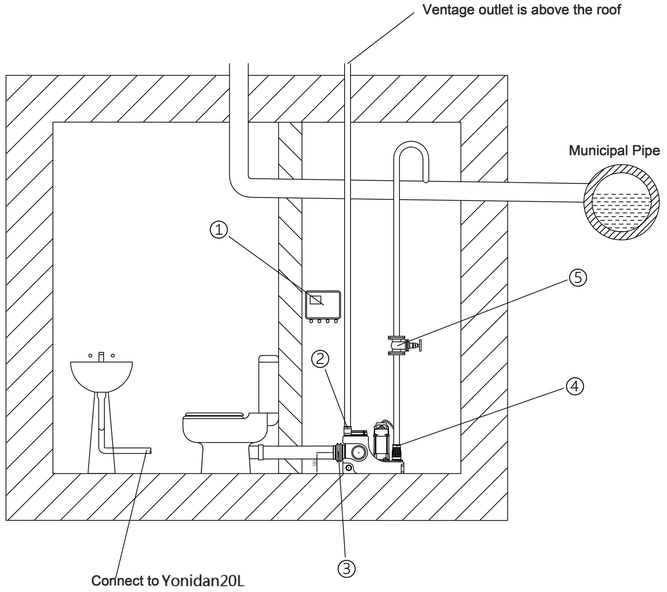

Yonidan
佑尼丹

Yonidan 60 Series (Single Pump)

Product Description

The Yonidan 60 series is a miniature lifting device. Mainly used in basements below municipal sewage pipes. It is designed for sewage drainage from toilets, bar sink,laundry room, air conditioner and other sources that locates in the basement.
Optional power supply: 380V/220V.
Yonidan 60 series equips with corrosion-resistant and environmental PE water tank, with good sealing and durability. It is of small size, light and convenient, with good appearance. The tank capacity is about 60L. Multiple horizontal/ vertical inlets are reserved for easy installation

Performance Diagram

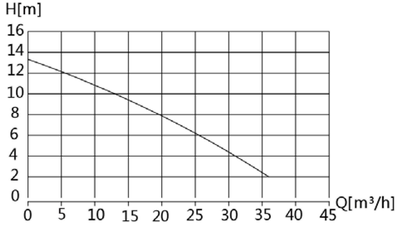

Performance Features

※ Pump equips with on-blocking vortex impeller.
Power: 0.75 KW
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250;
Pump Shaft Material: SUS410
※ Maximum flow diameter:50mm
※ Maximum pump startup times:60 times/hour
※ Cable length between controller and pump/float:5 meters
※ Equips with DN80 check valve
※ Outlet pipe diameter DN80 vertical outlet
(variable diameter)
※ Starting mode: air pressure/float dual level control.
Unique double-protection design
※ Machine waterproof grade :IP68(excluding control box)

Technical Parameter

Model	Tank Capacity(L)	Flow Dia(mm)	Inlet	outlet	Vent Pipe	Weight(KG)
Yonidan60L075S	60	50	DN100	DN80	DN40	32

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16
Yonidan60L075S	0.75	220	5.2	DN80	flux (m^3/h)	36	31	25	18	11	6		
Yonidan60L075S	0.75	380	1.9			36	31	25	18	11	6		

Dimension 520*520*436mm

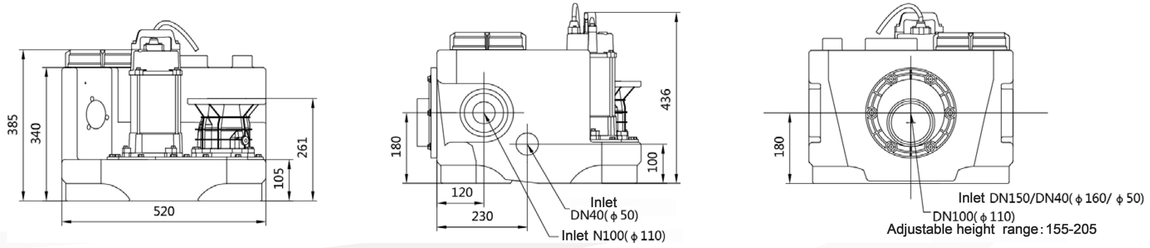

Installation Instruction

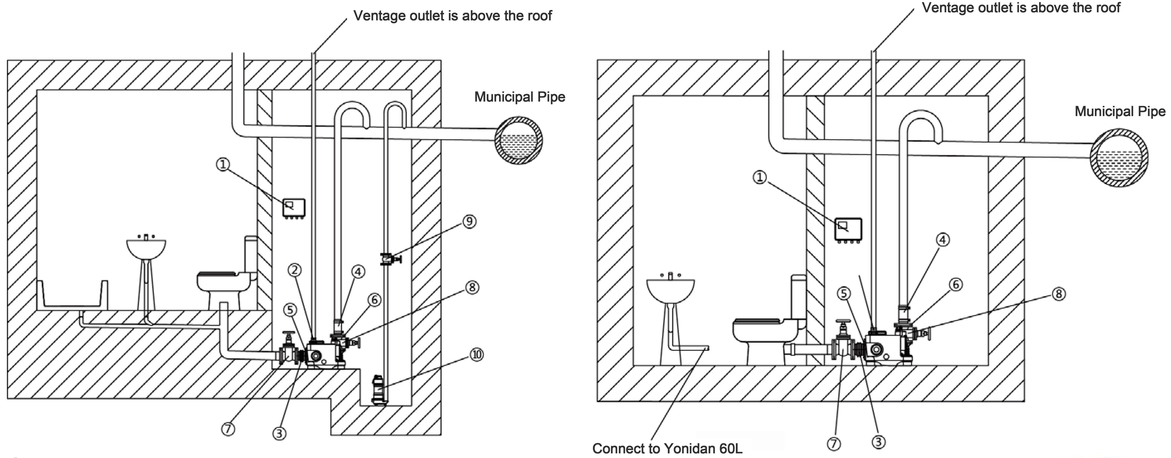

Accessory

No.	Accessory	Model	Qty	Notes
1	Controller	NK-1	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN80	1	Standard Equiped
5	Inlet Flange	DN100	1	Standard Equiped
6	Outlet Flange	DN80	1	Standard Equiped
7	Onlet Stop Vlave	DN100	1	Optional
8	Iutlet Stop Vlave	DN80	1	Optional
9	Auxiliary pump outlet stop valve	DN40	1	Optional
10	Auxiliary pump	/	1	Optional

Yonidan 80 Series(Pump)

Product Description

The Yonidan80 series is a compact dual pump lifting device, mainly used for the sewage drainage of basement below municipal sewage pipes. It is suitable for the domestic sewage discharge of toilets of villa basement,laundry room, big restaurants,hotels,commercial center and etc.The two pumps are standby for each other. Generally, they operate alternately.When there is flow peak, the two pumps operate simultaneously. If one pump fails, the system will automatically switch to the single pump operation mode, shield the faulty pump, display and alarm. Thus greatly extending the service life of equipment and reduce maintenance costs. Optional power supply :380V/220V. Yonidan 60 series equips with corrosion-resistant and environmental PE water tank, with good sealing and durability. It is compact with good appearance. The tank capacity is about 80L. Multiple horizontal/ vertical inlets are reserved for easy installation

Performance Diagram

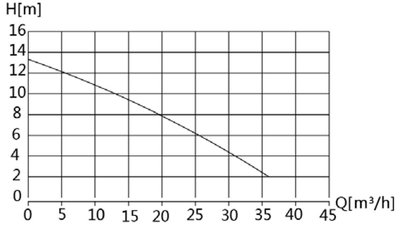

Performance Features

※ Pump equips with on-blocking vortex impeller. Power: 0.75 KW
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250; Pump Shaft Material: SUS410
※ Maximum flow diameter:50mm
※ Maximum pump startup times:120 times/hour
※ Cable length between controller and pump/float:5 meters
※ Equips with DN80 check valve
※ Outlet pipe diameter DN80 vertical outlet (variable diameter)
※ Starting mode: air pressure/float dual level control. Unique double-protection design
※ Machine waterproof grade :IP68(excluding control box)
※ Anti-floating fixed installation (anchor bolt)

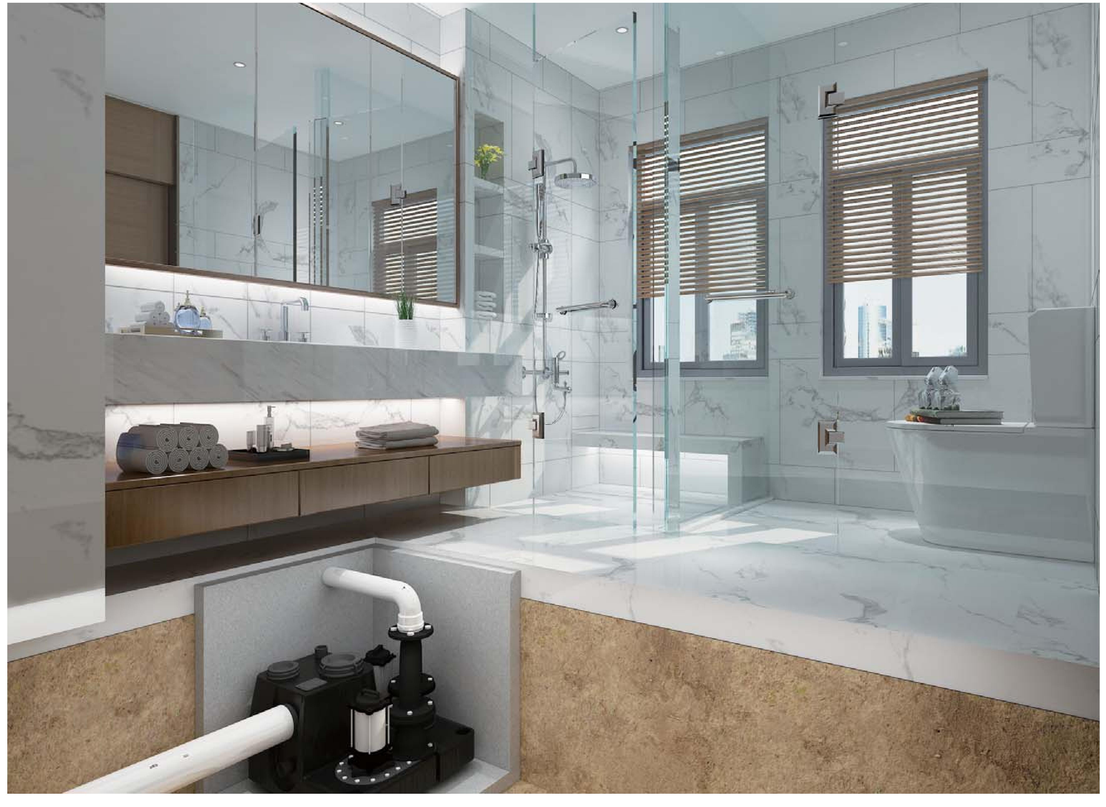

Technical Parameter

Model	Tank Capacity(L)	Flow Dia(mm)	Inlet	Outlet	Vent Pipe	Weight(KG)
Yonidan80L075D	80	50	DN100	DN80	DN40	82

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Oitlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16
Yonidan80L075D	0.75	220	5.2	DN80	flux (m^3/h)	36	31	25	18	11	6		
Yonidan80L075D	0.75	380	1.9			36	31	25	18	11	6		

Accessory List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-2	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN80	1	Standard Equiped
5	Inlet Stop Valve	DN100	1	Optional
6	Outlet Stop Valve	DN80	1	Optional
7	Auxiliary pump outlet stop valve	DN40	1	Optional
8	Auxiliary pump	/	1	Optional

Dimension 665*665*546mm





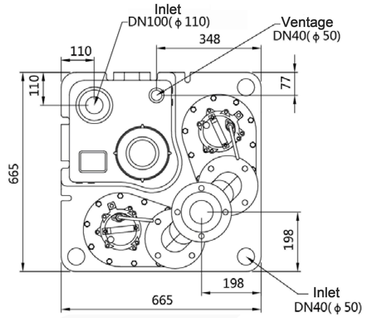



Installation Instruction

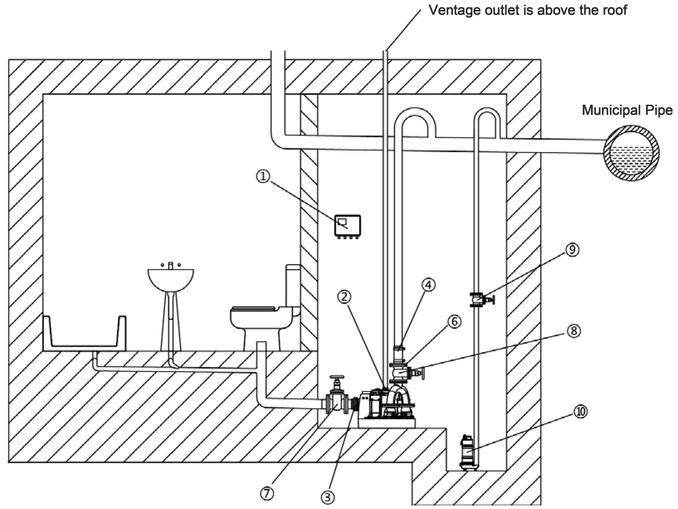

Yonidan 120 Series（Single Pump）

Product Description

The Yonidan 120 series is a compact dual pump lifting device, mainly used for the sewage drainage of detached villa,townhouse or stacked villa, restaurants,hotels, cinema and etc. It is suitable for large flow discontinuous drainage places

Optional power supply :380V/220V.

Yonidan 120 series equips with corrosion-resistant and environmental PE water tank, with good sealing and durability. It is compact with good appearance. The tank capacity is about 120L. Multiple horizontal/ vertical inlets are reserved for easy installation

Performance Diagram

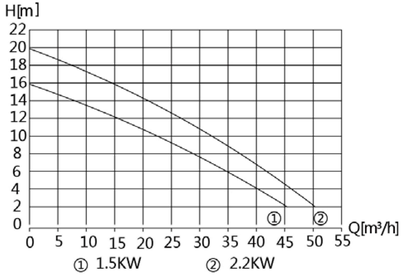

Performance features

※ Pump equips with on-blocking vortex impeller.
Optional power: 1.5kw～2.2kw
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250;
Pump Shaft Material: SUS410
※ Maximum flow diameter:60mm
※ Maximum pump startup times:60 times/hour
※ Cable length between controller and pump/float:5 meters
※ Equips with DN80 check valve
※ Starting mode:air pressure/float dual level control.
Unique double-protection design.
※ Machine waterproof grade :IP68(excluding control box)
※ Anti-floating fixed installation (anchor bolt).

Technical Parameter

Model	Tank Capacity(L)	Flow Dia(mm)	Inlet	Outlet	Vent Pipe	Weight(KG)
Yonidan120L150S	120	60	DN150/DN100	DN80	DN80	DN40	63
Yonidan120L220S	120	60	DN150/DN100	DN80	DN80	DN40	67

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Oitlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22
Yonidan120L150S	1.5	220	7.6	DN80	flux (m^3/h)	45	38	33	27	21	14	7				
Yonidan120L220S	2.2	220	11.2			50	45	41	36	31	26	20	12	7		
Yonidan120L150S	1.5	380	3.2			45	38	33	27	21	14	7				
Yonidan120L220S	2.2	380	5.8			50	45	41	36	31	26	20	12	7		

Accessory List

No.	Accessory	Model	Qty	Notes
1	controller	NK-1	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN80	1	Standard Equiped
5	Inlet Flange	DN100	1	Standard Equiped
6	Outlet Flange	DN80	1	Standard Equiped
7	Inlet Stop Vlave	DN100	1	Optional
8	Outlet Stop Vlave	DN80	1	Optional
9	Auxiliary pump outlet stop valve	DN40	1	Optional
10	Auxiliary pump	/	1	Optional

Dimension 720*620*537mm





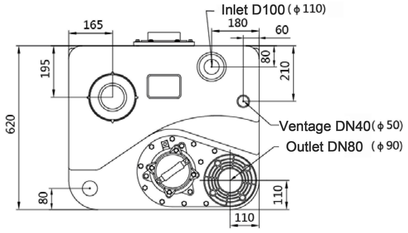

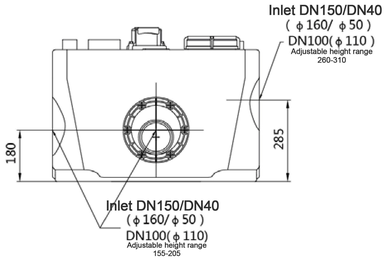

Installation Instruction

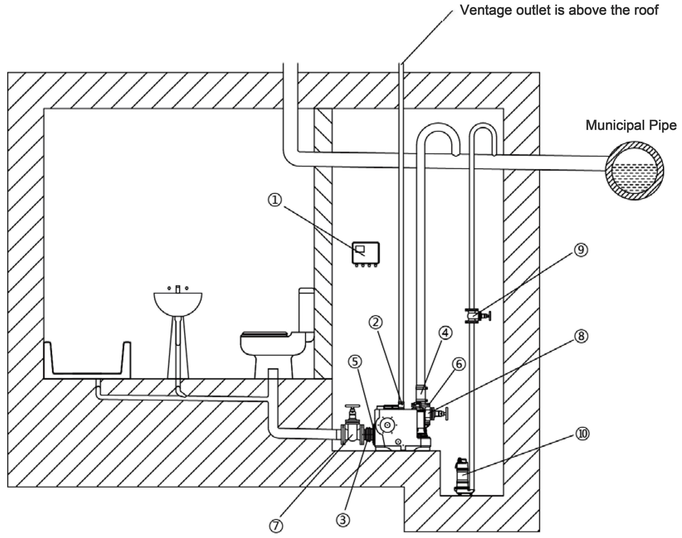

Yonidan 150 Series(Dual Pump)

Product Description

The Yonidan 150 series is mainly used for the sewage drainage of large villa with many toilets, public places like small mall and etc. The two pumps are standby for each other. Generally, they operate alternately.When there is flow peak, the two pumps operate simultaneously. If one pump fails, the system will automatically switch to the single pump operation mode, shield the faulty pump, display and alarm. Thus greatly extending the service life of equipment and reduce maintenance costs.
Optional power supply :380V/220V.
Yonidan 150 series equips with corrosion-resistant and environmental PE water tank, with good sealing and durability. The tank capacity is about 150L. Multiple horizontal/ vertical inlets are reserved for easy installation

Performance Diagram

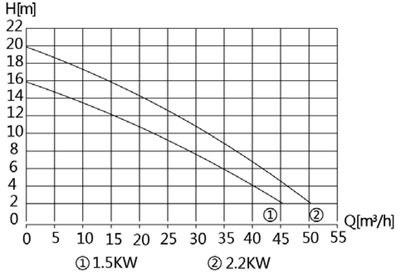

Performance Features

※ Pump equips with on-blocking vortex impeller.
Optional power: 1.5kw～2.2kw
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250;
Pump Shaft Material: SUS410
※ Maximum flow diameter:60mm
※ Maximum pump startup times:120 times/hour
※ Cable length between controller and pump/float:5 meters
※ Equips with DN80 check valve
※ Outlet pipe diameter DN80 vertical outlet
(variable diameter)
※ Starting mode: air pressure/float dual level control.
Unique double-protection design
※ Machine waterproof grade :IP68(excluding control box)
※ Anti-floating fixed installation (anchor bolt)

Technical Parameter

Model	Tank capacity(L)	Flow Dia (mm)	Inlet Flange	Iutlet Flange	Outlet Pipe	Vent Pipe	Weight (kg)
Yonidan150L150D	150	60	DN150/DN100	DN80	DN80	DN40	127
Yonidan150L220D	150	60	DN150/DN100	DN80	DN80	DN40	135

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Outlet Dia	Lift Distance (m)	2	4	6	8	10	12	14	16	18	20	22
Yonidan150L150D	1.5	220	7.6	DN80	flux (m^3/h)	45	38	33	27	21	14	7				
Yonidan150L220D	2.2	220	11.2			50	45	41	36	31	26	20	12	7		
Yonidan150L150D	1.5	380	3.2			45	38	33	27	21	14	7				
Yonidan150L220D	2.2	380	5.8			50	45	41	36	31	26	20	12	7		

Accessory List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-2	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN80	1	Standard Equiped
5	Inlet Flange	DN150	1	Standard Equiped
6	Outlet Flange	DN80	1	Standard Equiped
7	Inlet Stop Valve	DN100	1	Optional
8	Oitlet Stop Valve	DN80	1	Optional
9	Auxiliary pump outlet stop valve	DN40	1	Optional
10	Auxiliary pump	/	1	Optional

Dimension 865*720*578mm

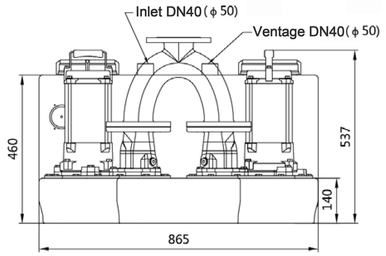

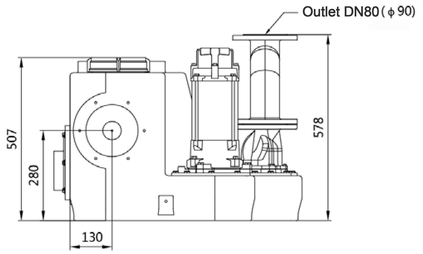

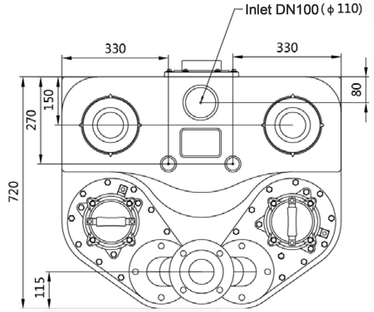

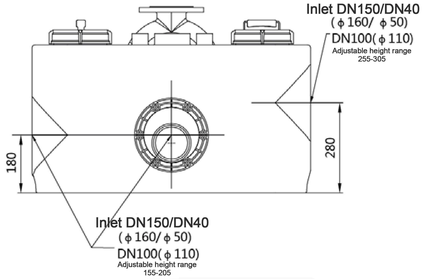

Installation Instruction

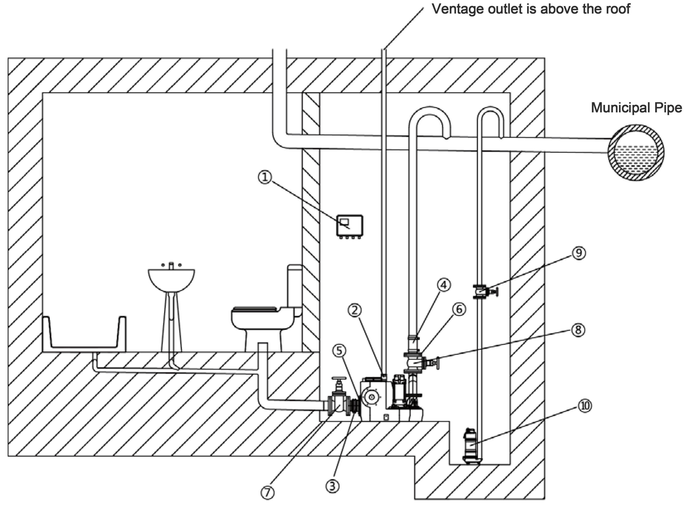

Performance Diagram

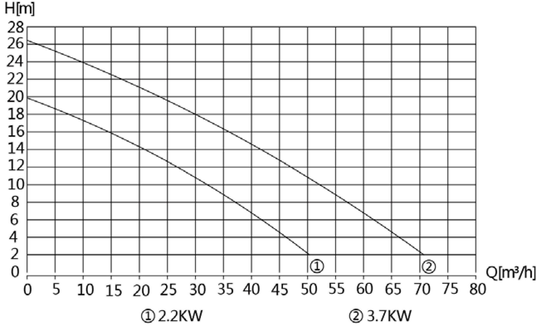

Product Descroption

Yonidan 450 series is a large volume dual pump lifting device. Mainly used for the sewage drainage of large commercial complexes, public enterprises and institutions, large-scale public places and etc. It is suitable for continuous large flow drainage places The two pumps are standby for each other. Generally, they operate alternately. When there is flow peak, the two pumps operate simultaneously. If one pump fails, the system will automatically switch to the single pump operation mode, shield the faulty pump, display and alarm. Thus greatly extending the service life of equipment and reduce maintenance costs. Optional power supply :380V/220V.
Yonidan 150 series equips with corrosion-resistant and environmental PE water tank, with good sealing and durability. The tank capacity is about 450L. Multiple horizontal/ vertical inlets are reserved for easy installation

Performance Features

※ Pump equips with on-blocking vortex impeller.
Optional power: 2.2kw～3.7kw
※ Pump body material: HT250, SUS304
※ Vortex impeller material: HT250; Pump Shaft Material: SUS410
※ Maximum flow diameter:60mm
※ Maximum pump startup times:120 times/hour
※ Equips with DN80 check valve
※ Cable length between controller and pump/float:5 meters
※ Outlet pipe diameter DN80 vertical outlet (variable diameter)
※ Starting mode: air pressure/float dual level control.
Unique double-protection design
※ Machine waterproof grade :IP68(excluding control box)
※ Anti-floating fixed installation (anchor bolt)

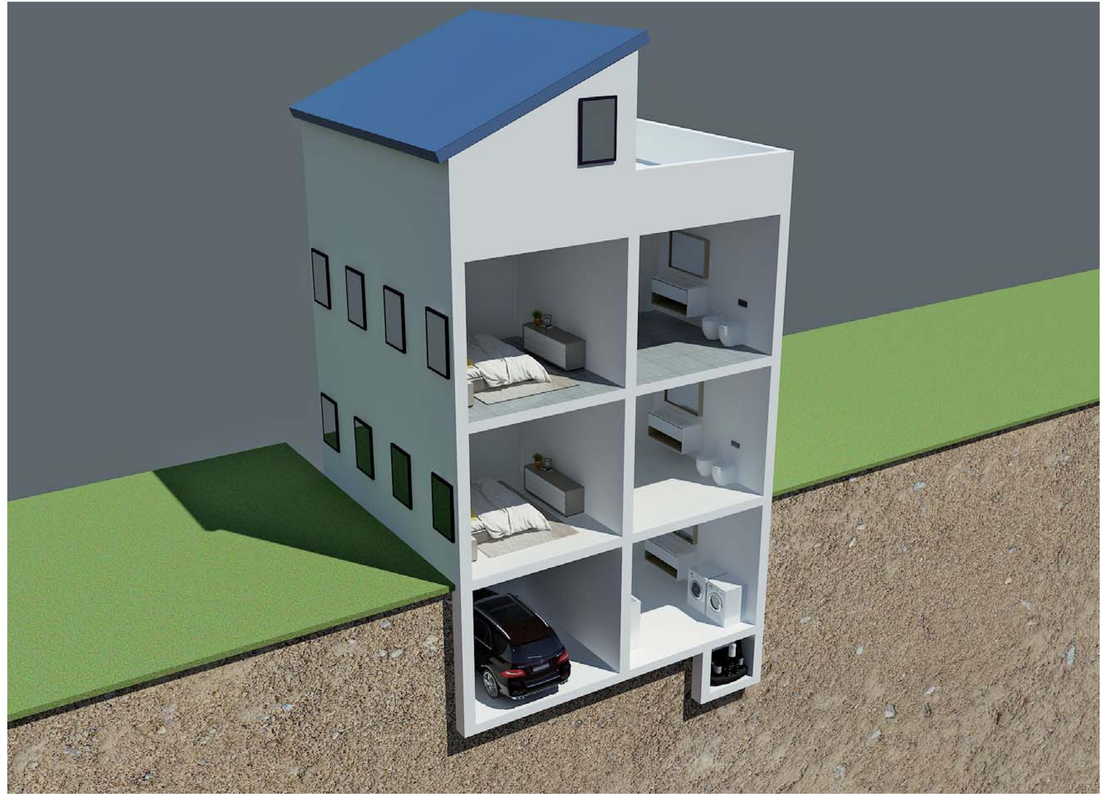

Technical Parameter

Model	Tank Capacity(L)	Flow Dia(mm)	Inlet Flange	Oitlet Flange	Outlet Pope	Vent Pipe	Weight (kg)
Yonidan450L220D	450	60	DN150/DN100	DN80	DN80	DN40	155
Yonidan450L370D	450	60	DN150/DN100	DN80	DN80	DN40	162

Selection Table

Model	Watt (KW)	Voltage (V)	Current (A)	Oitlet Dia	Lift Distabnce (m)	2	4	6	8	10	12	14	16	18	20	22	24	26	28
Yonidan450L220D	2.2	220	11.2	DN80	flux (m^3/h)	50	45	41	36	31	26	20	12	7					
Yonidan450L220D	2.2	380	5.8			50	45	41	36	31	26	20	12	7					
Yonidan450L370D	3.7	380	7.5			71	66	62	57	52	47	42	36	30	24	17	9		

Accessory List

No.	Accessory	Model	Qty	Notes
1	Controller	NK-2	1	Standard Equiped
2	Vent Hose	DN40	1	Standard Equiped
3	Inlet Hose	DN100	1	Standard Equiped
4	Outlet Hose	DN80	1	Standard Equiped
5	Inlet Flange	DN150/DN100	1	Standard Equiped
6	Outlet Flange	DN80	1	Standard Equiped
7	Inlet Stop Vlave	DN150/DN100	1	Optional
8	Oitlet Stop Valve	DN80	1	Optional
9	Auxiliary pump outlet stop valve	DN40	1	Optional
10	Auxiliary pump	/	1	Optional

Dimension 1120*900*747mm

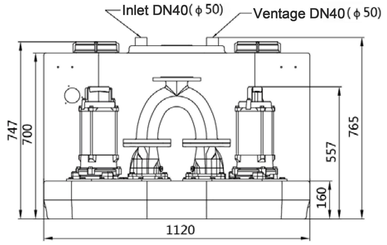

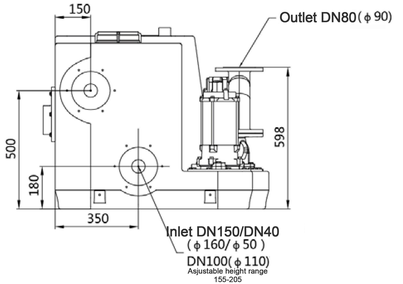

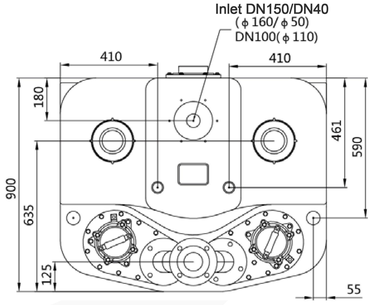

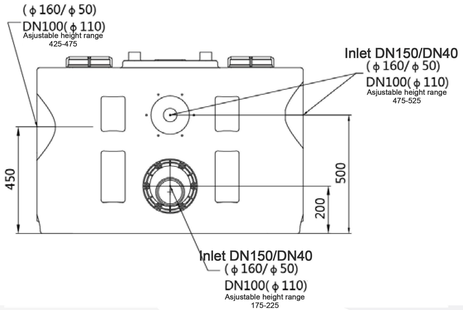

Installation Instruction

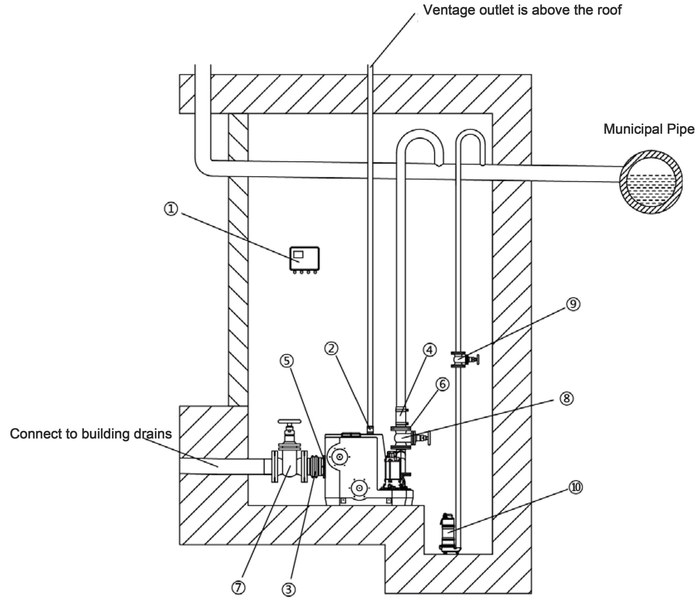

Yonidan Sewage Lifter Cases(part)

Shanghai Huangpu Yunjin Road Greenland Club
Shanghai Huangpu Greenland Haibo·Huangpu
No.222 Duojia Road,Huangpu,Shanghai
Shanghai Qingpu Yehuang Road Haibo·Fenghua
Shanghai Qingpu Yehuang Road Rongxin·Bowan
Shanghai Qingpu Xujin Yingting Mingshu
Shanghai Qingpu Xujin Biyou Commercial Center
Shanghai Qingpu Xule Road Sanwei Jiangnan
Shanghai Qingpu Xujin Shangdao Coffee
Shanghai Songjiang Hejing Tianyue
Shanghai Chongming ChengqiaoTown Shuian Jingting
Shanghai Chongming Dongtan Garden
Shanghai Pudong Baoji·Lanwan
Shanghai Fengxian Fuzhou Road Huixian Mingdi
Shanghai Yunjin Riad Lvdihui Center
Shanghai Minhang Dongyuan Gubei Shangdu
Shanghai Yangpu Xinda Taihe Shanghai Yard
Shanghai MInhang Lianzhong·Duyuehui
FLEXTRONICS SHANGHAI (MAURITIUS) CO.,LTD
Quanji Hotel(Shanghai International Exhibition Center,North Xujin Hotel)
Shanghai Lingang Shoufu
Shanghai Security Escort storage Center (reconstruction project)
Shanghai Pudong Taofei International Square
Shanghai Wuzhong Road Jiangong Huihao Commercial Center
Shanghai University of Science and Technology(New project of affiliated School)
Shanghai Changshou Road Camouflage Shop(100L)
Shanghai Pudong Dongfang Villa II
Shanghai Baoshan Battle of Shanghai Memorial Park
Shanghai Minhang Dongyuan Libao Square
No.2251,Zhenbei Road, Putuo,Shanghai
Shanghai Yangpu Taihe Yard
Zhejiang Deqing Taiyuan Mall (reconstruction project)
Zhejiang Hangzhou Binjiang Qiangshen Shooting Club
Zhejiang Hangzhou Binjiang Office Building of Wolong Electric Research Institute
Zhejiang Hangzhou The Star of Xixi
Zhejiang Hangzhou Zhijiang Pincheng
Zhejiang Hangzhou Shuiyin Linyu(Terrace, Villa)
Zhejiang Hangzhou Yuanyang Gongguan
Hangzhou Metro Dongcheng Plaza
Huzhou Yangshan Chenyuan
Xiaoshan HejiayuanEmerald City
Tianyuan Muge
Bandao Graden
Zhejiang Fuyang Fuchun Shangcheng
Zhejiang Fuyang No.1 Yard(Lanshan Yard)
Dahua Xiye Fengyun
Shanshui Yuyuan
Zhejiang Yiwu Jinhua Yuyuan
Zhejiang Ningbo Bojingting Villa
Zhejiang Ningbo Xiangshan Dingtang Town New Rural Reformation
Zhejiang Tiantai Leidison Hotel
Zhejiang Wenzhou Ruian Hualong Yipin
Zhejiang Wenzhou Jingdu Yuefu
Zhejiang Zhoushan Cihang Square
Zhejiang Jiashan Yunlanwan
Zhejiang Jiaxing Shanghai Huafu Square
Zhejiang Jiaxing CREC Huayu Jiangnan Villa
Zhejiang Anji Tongshan Bandao
Zhejiang Jiande Qiantan Twon Shangxikou Village
Zhejiang Anji Yinyi Langjing
Elephant Architectural Design and Research Institute Co. LTD(Hangzhou,Zhejiang)
Jiangsu Kunshan Beida Ziyuancheng
Jiangsu Nanjing Daguan Tiandi
Jiangsu Nanjing Jianye Haiyue Mingdu
Jiangsu Suzhou Sucheng Commercial Center
Jiangsu Zhenjiang Minrenfu Villa
Jiangsu Kunshan Rialway Station Pandora Food Plaza
Jiangsu Nantong SanshengPuyuefu
Jiangsu Nantong Qidong Xiangman Changti Project
Jiangsu Taizhou Tianranju Villa
Jiangsu Taizhou Mingfa Villa
Jiangsu Taizhou Qiyuan Villa
Jiangsu Nanjing Guozhan Center
Shandong Jinan Qilu Bank Huaqiang Square Sub-Bank
Shandong Jinan Military Qianwei Art Troupe Shandong Provincial Hospital
Shandong Jinan Jianda Garden
Shandong Jinan Taoli Chunfeng
Shandong Jinan Longshan Xisi Manor
Shandong Dalian Jingdi Community Tanjing
Shandong Qingdao Taipingdao Public Toilet
Shandong Liaocheng Dongchang Yufu
Shandong Liaocheng Dongchang Shoufu
Shandong Zibo Linzi Tangyue Projec
Shandong Heze Juancheng Junan Tianyuan Beer Town Project
Weifang Hengxin Junyue Shijia
Weifang Shengfei Manbu
Weifang Yangguang Jiari
Weifang Hengxin Lixiang Town
Guangdong Guangzhou Huizhou Biguiyuan
Guangdong Zhongshan Library
Guangdong Huizhou Hailunbao Xiangnai Graden V
Guangdong Huizhou Dayawan Xiangnai Garden VI
Guangdong Huizhou Dayawan Hengtai Jinshang Garden
Guangdong Dingguan Shijicheng Villa
Guangdong Zhongshan Zhongxin Shanyuhu Villa
Shenzhen Xili Shanzhuang Villa
Guangxi Guilin Quanzhou Town Xiangjiang Yihao
Hebei Zhangjiakou Chongli Cuiyunshan Aoxue Twon
Henan Xinyang Sanchuan Yujingtai
Henan Gongyi Jianye Baicheng Tiandi Project
Henan Yingyang Xijun Yuanzhu
Gansu Longnan Huixian Town Jinhui Wine
Ningxia YInchuan Jingfeng Yuehaiwan New Hualian Square
Neimenggu Huhehaote Xunhe International Garden
Neimenggu Huhehaote Yili Aodong International II
Heilongjiang Daqing Ronggongguan
Beijing Jaidian Xishan Cinema of Creative Undustry Base
Beijing Dongfang Taiyangcheng III Villa
Beijing Chaoyang Anwai Xiaoguan Dongli
Jiangxi Yichun Wanzai Cultural Exhibition Center
Jiangxi Nanchang Hudutan New District Tongluowan Community
Jiangxi Nanchang Langqinwan Villa
Jiangxi Nanchang Residential Theme Park
Jiangxi Yichun Wanzai Ancient Twon Reserve
Fujian Putian Baoli Central Park
Sichuan Luyang Fenghuang Shoufu
Sichuan Chengdu Dacheng Xiaoyuan Villa
Xiamen Dazhou Longjun Villa
Xiamen Baoli Sanqiandong Villa
Xiamen Haier Huaxi Villa
Xiamen Yard Villa
Zhangzhou Wankeli Villa
Xiamen Shishi Shimao Villa
Xiamen Quanzhou Haijing International Huayuan Villa
Fujian Fuzhou Rongxin David Twon Villa
Tianjin Fudi Tianjin Konggang Villa
Hubei Wuhan Guanshan Hongjing Graden
Hubei Wuhan Hankou Railway Station
Hubei Wuhan Yuehuqiao Police Station
Hubei Wuhan Shimao Longwan
HUbei Wuhan Chengtou Hancheng Zhengkang Clinic
Hubei Wuhan Liantou Huashanjun
Hubei Wuhan Coastal Sailuocheng III
Hubei Wuhan Fudi Donghu Internatioanl
HUbei Wuhan Gemdale Saint Aimilun
Hubei Wuhan Mr.Xie Restaurant Sanyang Road Restaurant
Hubei Wuhan Mr.Xie Restaurant Wuchang Restaurant
.....